

VDTCAP

Series FY(X)– 85°C 10.000 h


Capacitors screw terminal type – Long Useful Life

- FY- Flat Bottom
- FYX- Mounting Stud
- Capacitance Tolerance:-20 + 20%– standard(M)
- Capacitance Tolerance: -10 + 30% - on request (X)
- Climatic category: 40/85/56
- Case: 51x105 – 90 x 222
- Temperature – 40°C + 85°C
- All welded construction reliable electrical contact

Mechanical Outlines

- Case: aluminium made
- Terminals: screw
- Sealing: hermetic by EPR gasket, on a resin cover
- Pressure Release Vent: silicone-rubber
- Sleeve: self-extinguishing thermo shrinkable
- Size: see enclosed drawings
- Mounting Hardware: see hardware section
- External Material UL94-V0

Ordering Code: Example

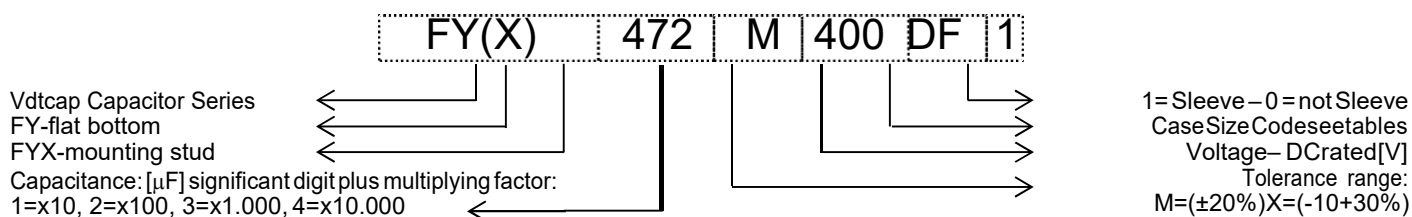

Ripple Current

The allowable values of ripple current in Ampères, are related to the temperature and frequency by following equation:

$$I_{\text{Ripple}} = K_t \cdot K_f \cdot I_{\text{Ripple@85°C}}$$

Where:

- $I_{\text{Ripple@85°C}}$ is the limit given by tables, @ 85°C/100HZ
- K_t is the Temperature Correlation Factor
- K_f is the Frequency Correlation Factor

Note .Superimposed alternating voltage summed to DC volage must not exceed rated voltage, rated ripple current must not be exceeded and no reverse polarity is allowed

°C	40	55	65	75	85
Kt	1.65	1.50	1.40	1.20	1.00

Table 1-Kt Values

Vn/Hz	Kf			
	50<V=300		V>300	
	Diameter Code A,B		DiameterCodeC,D,E	
50	0.79	0.76	0.78	0.72
100	1.00	1.00	1.00	1.00
120	1.04	1.04	1.02	1.03
200	1.12	1.17	1.06	1.14
300	1.16	1.28	1.08	1.24
400	1.20	1.35	1.09	1.29
500	1.22	1.39	1.09	1.32
>1000	1.25	1.45	1.09	1.37

Table 2-Kf Values

Expected Lifetime End of Life Criteria

During useful life typical electrical parameters of electrolytic capacitor are subject to change.

End of Life criteria, when rated temperature, voltage and ripple are applied, are:

$$\frac{\Delta C}{C_{10}} \leq 30\% \quad \text{Equation 1}$$

$$ESR \leq 3 \cdot ESR_{10} \quad \text{Equation 2}$$

$$I_r \leq I_{r10} \quad \text{Equation 3}$$

where t_0 is the initial value

Voltage Endurance Test Requirements

On Voltage Endurance Test are based Expected Lifetime Curves.

End of Life criteria, when rated temperature, and voltage are applied for 2'000hrs, are

$$\frac{\Delta C}{C_{10}} \leq 15\% \quad \text{Equation 4}$$

$$ESR \leq 1,3 \cdot ESR_{10} \quad \text{Equation 5}$$

$$I_r \leq I_{r10} \quad \text{Equation 6}$$

where t_0 is the initial value

Expected Lifetime Vs Temperature and Ripple Current

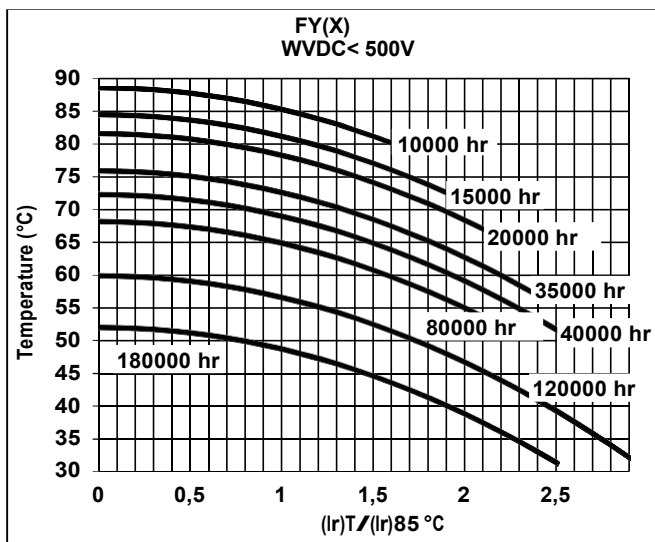


Table 3

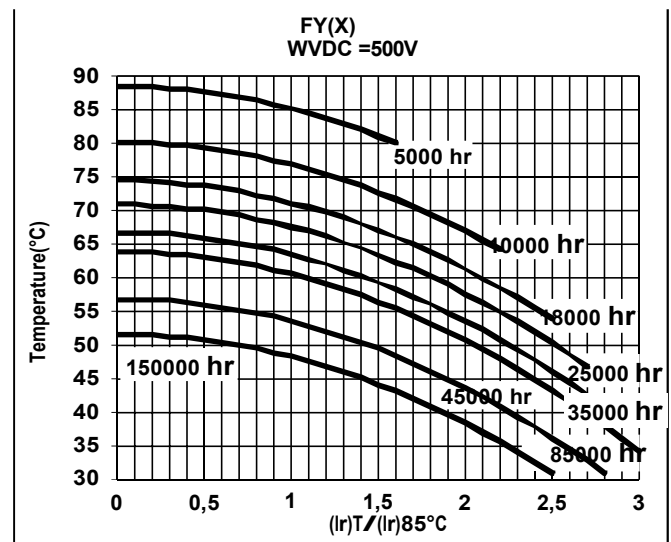


Table 4

Leakage Current

After the rated voltage has been applied to the capacitor for 5 minutes the leakage current must be within those limits.

Maximum limit	@25°C	$I_f \leq 0,004 \times C \times V$
Operating limit	@25°C	$I_f \leq 0,001 \times C \times V$

Where: I_f =leakage current [μA], C =capacitance [μF],
 V =rated voltage [V]

Surge Voltage


Working Voltage	63	75	100	160	200	250	350	400	420	450	500
Surge Voltage	73	86	115	185	230	290	385	440	460	495	525

	Capacitance	Case	Diam	Height	Tanδ	ESRmax typ		Zmax	Iripple @100Hz		Ordering Code
	[μF]@100Hz		[mm]	[mm]	[%]@100Hz	[mΩ]@100Hz	[mΩ]@10KHz		[A]@55°C	[A]@85°C	(X) for mounting stud
63	22200	BB	51	83	0,26	19	15	14	17,1	12,2	FY(X)223M063BB1
		BC	51	105	0,24	17	14	13	19,7	14,1	FY(X)223M063BC1
	33000	BC	51	105	0,28	14	11	10	22,3	15,9	FY(X)333M063BC1
		CC	63	105	0,27	13	10	10	25,8	18,4	FY(X)333M063CC1
	47000	CC	63	105	0,30	10	8	8	29,2	20,9	FY(X)473M063CC1
	68000	DC	76	105	0,36	8	7	6	35,4	25,3	FY(X)683M063DC1
	100000	DF	76	145	0,40	6	5	5	47,1	33,7	FY(X)104M063DF1
100	10000	BB	51	83	0,12	19	15	14	16,9	12,1	FY(X)103M100BB1
		BC	51	105	0,1	16	13	12	20,6	14,7	FY(X)103M100BC1
	15000	BC	51	105	0,11	12	9	9	24,0	17,1	FY(X)153M100BC1
	22200	CC	63	105	0,15	11	9	8	28,3	20,2	FY(X)223M100CC1
		DC	76	105	0,14	10	8	8	32,5	23,2	FY(X)223M100DC1
	33000	DC	76	105	0,18	9	7	7	35,2	25,1	FY(X)333M100DC1
		DF	76	145	0,16	8	6	6	42,8	30,6	FY(X)333M100DF1
47000	DF	76	145	0,18	6	5	5	48,1	34,4	FY(X)473M100DF1	
160	4700	BC	51	105	0,1	34	27	25	14,1	10,1	FY(X)472M160BC1
		CC	63	105	0,09	30	24	23	16,9	12,0	FY(X)472M160CC1
	6800	DC	76	105	0,1	23	19	18	21,4	15,3	FY(X)682M160DC1
	10000	DC	76	105	0,11	18	14	13	24,8	17,7	FY(X)103M160DC1
	15000	DF	76	145	0,12	13	10	10	33,3	23,8	FY(X)153M160DF1
	22200	DF	76	145	0,15	11	9	8	36,1	25,8	FY(X)223M160DF1
		EF	90	222	0,14	10	8	8	49,1	35,1	FY(X)223M160EF1
200	3300	BC	51	105	0,10	48	39	36	11,8	8,4	FY(X)332M200BC1
	4700	CC	63	105	0,10	34	27	25	16,0	11,4	FY(X)472M200CC1
		DC	76	105	0,09	30	24	23	18,8	13,4	FY(X)472M200DC1
	6800	DC	76	105	0,10	23	19	18	21,4	15,3	FY(X)682M200DC1
	10000	DF	76	145	0,11	18	14	13	28,4	20,3	FY(X)103M200DF1
	15000	DF	76	145	0,12	13	10	10	33,3	23,8	FY(X)153M200DF1
	22200	DF	76	145	0,12	9	7	7	40,3	28,8	FY(X)223M200DF1
DK		76	165	0,12	9	7	7	42,7	30,5	FY(X)223M200DK1	
33000	DK	76	165	0,12	6	5	4	52,3	37,4	FY(X)333M200DK1	
250	2220	BB	51	83	0,09	65	52	49	9,2	6,5	FY(X)222M250BB1
		BC	51	105	0,08	58	46	43	10,8	7,7	FY(X)222M250BC1
	3300	BC	51	105	0,10	48	39	36	11,8	8,4	FY(X)332M250BC1
		CC	63	105	0,09	43	35	33	14,1	10,1	FY(X)332M250CC1
	4700	DC	76	105	0,10	34	27	25	17,8	12,7	FY(X)472M250DC1
	6800	DC	76	105	0,10	23	19	18	21,4	15,3	FY(X)682M250DC1
	10000	DF	76	145	0,10	16	13	12	29,8	21,3	FY(X)103M250DF1
		EC	90	105	0,10	16	13	12	28,6	20,5	FY(X)103M250EC1
15000	DF	76	145	0,10	11	8	8	36,5	26,1	FY(X)153M250DF1	

	Capacitance	Case	Diam	Height	Tanδ	ESRmax typ		Zmax	Iripple @100Hz		Ordering Code
	[μF]@100Hz		[mm]	[mm]	[%]@100Hz	[mΩ]@100Hz	[mΩ]@10KHz		[A]@55°C	[A]@85°C	(X) for mounting stud
350	2220	BC	51	105	0,09	65	52	49	10,2	7,3	FY(X)222M350BC1
	3300	CC	63	105	0,09	43	35	33	14,1	10,1	FY(X)332M350CC1
		DC	76	105	0,08	39	31	29	16,7	11,9	FY(X)332M350DC1
	4700	DC	76	105	0,09	30	24	23	18,8	13,4	FY(X)472M350DC1
		DF	76	145	0,08	27	22	20	22,8	16,3	FY(X)472M350DF1
	6800	DF	76	145	0,08	19	15	14	27,5	19,6	FY(X)682M350DF1
		DJ	76	222	0,09	21	17	16	31,2	22,3	FY(X)682M350DJ1
		EC	90	105	0,11	26	21	19	22,5	16,1	FY(X)682M350EC1
	10000	DF	76	145	0,11	18	14	13	28,4	20,3	FY(X)103M350DF1
		DJ	76	222	0,10	16	13	12	35,9	25,6	FY(X)103M350DJ1
		EC	90	105	0,10	16	13	12	28,6	20,5	FY(X)103M350EC1
	15000	DF	76	145	0,10	11	8	8	36,5	26,1	FY(X)153M350DF1
		DJ	76	222	0,10	11	8	8	44,0	31,4	FY(X)153M350DJ1
		EF	90	145	0,12	13	10	10	36,6	26,2	FY(X)153M350EF1
		EJ	90	222	0,12	13	10	10	44,0	31,4	FY(X)153M350EJ1
	18000	EF	90	145	0,12	11	8	8	40,1	28,7	FY(X)183M350EF1
	22200	EJ	90	222	0,12	9	7	7	53,3	38,1	FY(X)223M350EJ1
	27000	EJ	90	222	0,12	7	6	5	59,0	42,2	FY(X)273M350EJ1
400	1500	BB	51	83	0,10	106	85	80	7,2	5,1	FY(X)152M400BB1
		BC	51	105	0,10	106	85	80	8,0	5,7	FY(X)152M400BC1
	2200	BC	51	105	0,10	72	58	54	9,6	6,9	FY(X)222M400BC1
		CC	63	105	0,09	65	52	49	11,5	8,2	FY(X)222M400CC1
		DC	76	105	0,08	58	46	43	13,6	9,7	FY(X)222M400DC1
	3300	CC	63	105	0,09	43	35	33	14,1	10,1	FY(X)332M400CC1
		DC	76	105	0,09	43	35	33	15,7	11,2	FY(X)332M400DC1
		DF	76	145	0,09	43	35	33	18,0	12,9	FY(X)332M400DF1
	4700	DC	76	105	0,10	34	27	25	17,8	12,7	FY(X)472M400DC1
		DF	76	145	0,09	30	24	23	21,5	15,4	FY(X)472M400DF1
	6800	DF	76	145	0,08	19	15	14	27,5	19,6	FY(X)682M400DF1
	10000	DJ	76	222	0,11	18	14	13	34,2	24,5	FY(X)103M400DJ1
		EF	90	145	0,11	18	14	13	31,2	22,3	FY(X)103M400EF1
	15000	EJ	90	222	0,08	8	7	6	53,9	38,5	FY(X)153M400EJ1
	18000	EJ	90	222	0,08	7	6	5	59,0	42,2	FY(X)183M400EJ1
450	1000	BB	51	83	0,12	191	153	143	5,4	3,8	FY(X)102M450BB1
	1500	BB	51	83	0,11	117	93	88	6,8	4,9	FY(X)152M450BB1
		BC	51	105	0,10	106	85	80	8,0	5,7	FY(X)152M450BC1
	2220	CC	63	105	0,12	87	69	65	10,0	7,1	FY(X)222M450CC1
		DC	76	105	0,11	80	64	60	11,6	8,3	FY(X)222M450DC1
	3300	DC	76	105	0,12	58	46	43	13,6	9,7	FY(X)332M450DC1
		DF	76	145	0,1	48	39	36	17,1	12,2	FY(X)332M450DF1
	4700	DF	76	145	0,12	41	33	30	18,6	13,3	FY(X)472M450DF1
		EC	90	105	0,11	37	30	28	18,7	13,4	FY(X)472M450EC1

	Capacitance	Case	Diam	Height	Tanδ	ESRmax typ		Zmax	Iripple @100Hz		Ordering Code
	[μF]@100Hz		[mm]	[mm]	[%]@100Hz	[mΩ]@100Hz	[mΩ]@10KHz		[A]@55°C	[A]@85°C	(X) for mounting stud
450	6800	DF	76	145	0,13	30	24	23	21,6	15,4	FY(X)682M450DF1
		DJ	76	222	0,12	28	22	21	27,0	19,3	FY(X)682M450DJ1
	10000	DJ	76	222	0,12	19	15	14	32,8	23,4	FY(X)103M450DJ1
		EJ	90	222	0,12	19	15	14	35,9	25,7	FY(X)103M450EJ1
	15000	EJ	90	222	0,13	14	11	10	42,3	30,2	FY(X)153M450EJ1
500	1000	BC	51	105	0,13	207	166	155	5,7	4,1	FY(X)102M500BC1
	1500	DC	76	105	0,13	138	110	104	8,8	6,3	FY(X)152M500DC1
	2220	CC	63	105	0,13	94	75	71	9,6	6,9	FY(X)222M500CC1
		DC	76	105	0,13	94	75	71	10,7	7,6	FY(X)222M500DC1
		DF	76	145	0,13	94	75	71	12,3	8,8	FY(X)222M500DF1
	3300	DF	76	145	0,12	58	46	43	15,6	11,2	FY(X)332M500DF1
	3900	DF	76	145	0,12	49	39	37	17,0	12,1	FY(X)392M500DF1
	4400	DF	76	145	0,12	43	35	33	18,0	12,9	FY(X)442M500DF1
	4700	DF	76	145	0,12	41	33	30	18,6	13,3	FY(X)472M500DF1
	5600	DF	76	145	0,12	34	27	26	20,4	14,5	FY(X)562M500DF1
	6800	DJ	76	222	0,12	28	22	21	26,9	19,2	FY(X)682M500DJ1
	10000	EJ	90	222	0,12	19	15	14	35,8	25,6	FY(X)103M500EJ1

Dimension, Quantity and Weight for box

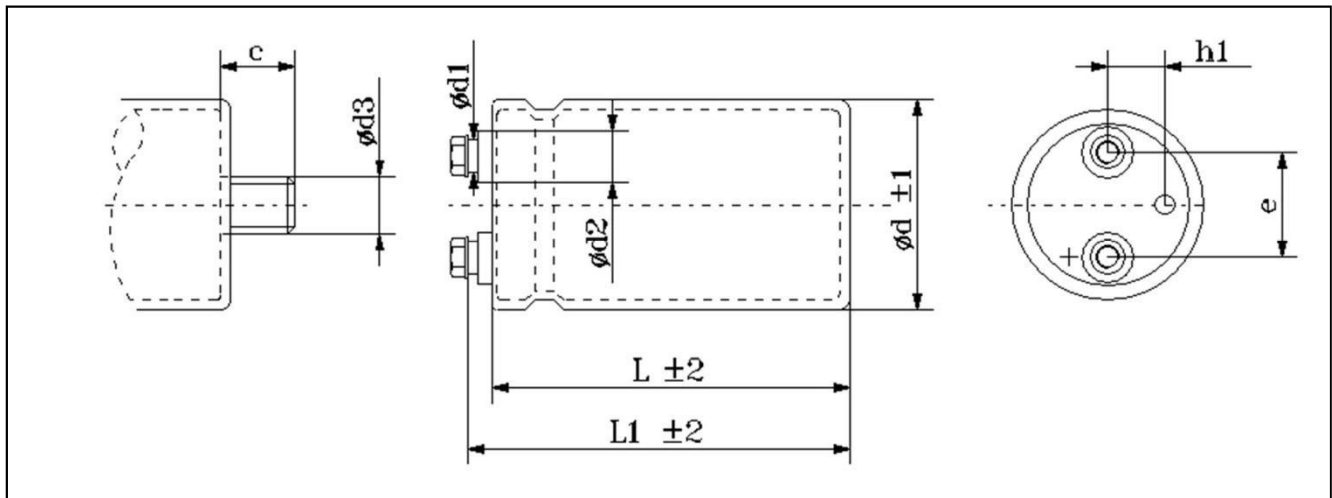

Case				Connections							Mounting Stud			Packaging	
Code	DxL	L1	h1	d1	d2	e	Terminal	Screw			Screw			Pcs/Box	Weight/box
							Code	Thread	Torque	Lenght	d3	c	Torque		
BB	51x83	85	13	8	13	22.2	X	M5	2,0	10	M12	16	10Nm	30	6-9
BB	51x83	85	13	13	18	22.2	X	M5	2,0	10	M12	16	10Nm	30	6-9
BC	51x105	109	13	8	13	22.2	X	M5	2,0	10	M12	16	10Nm	30	6-9
BC	51x105	109	13	13	18	22.2	X	M5	2,0	10	M12	16	10Nm	30	6-9
CC	63x105	111	16	8	13	28.6	X	M5	2,0	10	M12	16	10Nm	20	6-8
CC	63x105	111	16	13	18	28.6	X	M5	2,0	10	M12	16	10Nm	20	6-8
DC	76x105	111	19	13	18	31.8	X	M5	2,0	10	M12	16	10Nm	12	5-7
DF	76x145	151	19	13	18	31.8	X	M5	2,0	10	M12	16	10Nm	12	6-14
				18	23		G	M6	2,5						
DK	76x165	173	19	13	18	31.8	X	M5	2,0	10	M12	16	10Nm	12	6-14
				18	23		G	M6	2,5						
DJ	76x222	222	19	13	18	31.8	X	M5	2,0	10	M12	16	10Nm	8	9-11
				18	23		G	M6	2,5						
EC	90x105	112	19	18	23	31,8	G	M6	2,5	10	M12	16	10Nm	6	7-9
EF	90x145	153	19	18	23	31,8	G	M6	2,5	10	M12	16	10Nm	6	9-11
EJ	90x222	227	19	18	23	31,8	G	M6	2,5	10	M12	16	10Nm	6	8-12

All dimensions in mm, torque in Nm, weight in kg

D	51	63	76	90												
Code	B	C	D	E												
H	83	85	90	95	100	105	110	115	120	125	130	135	140	145	150	155
Code	B	A	D	E	G	C	H	I	L	N	M	O	P	F	Q	R
H	160	165	170	175	180	185	190	195	200	205	210	215	220	225	230	235
Code	S	K	T	2	U	3	V	5	W	6	7	8	J	8	Y	Z